MDF-25H100

-25°C MEDICAL DEEP FREEZER





FEATURERS



Fast pull down

Better cooling performance



Coil evaporator

Better temperature uniformity



Inner-door design

4 individual inner door




Universal castor wheels

Proven heavy-duty castors with brake



Lockable doors

Standard locks with keys



MDF-25V328E Pull Down Test at Ambient



High-quality steel materials

Antibacterial and corrosion resistant



Precise temp. control

Temp. control accurate to 0.1°C



5 types of alarm

Audible and visual alarms




Variable space

Height adjustable shelves




Eco-friendly

CFC-free refrigerant and energy-saving



STRUCTURE

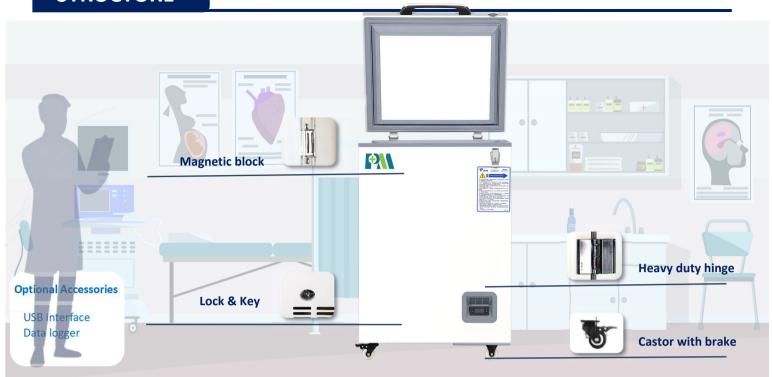





Coil evaporator cooling system makes the chamber temperature more uniform.
The 4 independent inner doors give the cabinet better insulation performance and are more convenient to use.

PARAMETER

Performance		Refrigeration System		Alarms	
Cooling method	Direct Cooling	Refrigerant	HC-R290	High/low temperature	Υ
Defrost	Manual	Temp. controller	Microprocessor	Power failure	Υ
Shelf/drawer	1	Sensor	NTC	Sensor error	Υ
Temperature range	-10~-25	Display	Digital display	Controller failure	Υ
Ambient temperature	10~32°C	External material	SPCC sprayed steel	Door ajar	Υ
Noise (db)	46	Compressor QTY	1	Power failure backup	8 hours
Electrical Data		Dimensions		Other	
Voltage frequency(V/Hz)	220V 50Hz	Package size(W*D*H)(mm)	675*625*1000	Inner door Qty	5
Power (W)	170W	Capacity (L/cu.ft)	100/3.7	Remote alarm port	Optional
Current (A)	1.5A	Exterior size(W*D*H)(mm)	621*588*883	Access port QTY/Dia.	1/25mm

480*380*665

Interior size(W*D*H)(mm)

Internal material

1.59kWh/24h

SPCC sprayed steel

Power consumption